ELEMENT

Efficient Capability



KEWAUNEE

Element Lab Bench

- Designed with your space in mind. With integrated electric and services in the uprights.
- Height adjustable, multiple circuit and service options.

Configure Your Bench

- Choose your bench either knockdown or fully assembled.
- Then choose your accessories.





FEATURES

- Data ports standard on plumbing posts
- SEFA 10, Category 3 – 1,000 pound capacity
- Ships knocked down or assembled
- Worktop height adjustable on 1" increments
- Plumbing or electric on posts available
- Integrated cable management under worktop
- Up to three fixtures per upright post
- Seismic anchoring accessories available
- Multiple standard sizes to choose from
- Listed to UL 962 Standard

Element Lab Bench

Element Lab Bench Part Number Explanation

ET01C8436 72-P3SKC2GK

Product Code
ET = Element

Height
84 = 84" Tall

Worktop Depth
30 = 30" Deep
36 = 36" Deep

Worktop Length
36 = 36" Length
42 = 42" Length
48 = 48" Length
54 = 54" Length
60 = 60" Length
66 = 66" Length
72 = 72" Length

Power Options
P0 = None
P1 = Left
P2 = Right
P3 = Both*
* Both Legs Will Receive Same Circuit Selection

Shipping
Knockdown = **K**
Assembled = **A**

Feet
Stabilizing Casters = **C**
Glides = **G**


Circuits
No Electric = **C0**
All 4 on 1 Circuit = **C1**
Dual Circuit on (1) Power Cord = **C2**
Dual Circuit on (2) Power Cords = **C3**

Electrical Outlet Color
No Electric = **0**
Black = **K**
Ivory = **V**
White = **W**
Grey = **G**
Red = **R**

Electrical Grade
No Electric = **0**
Spec = **S**
Hospital = **H**

Circuit Layouts Circuit 1 Circuit 2


C1

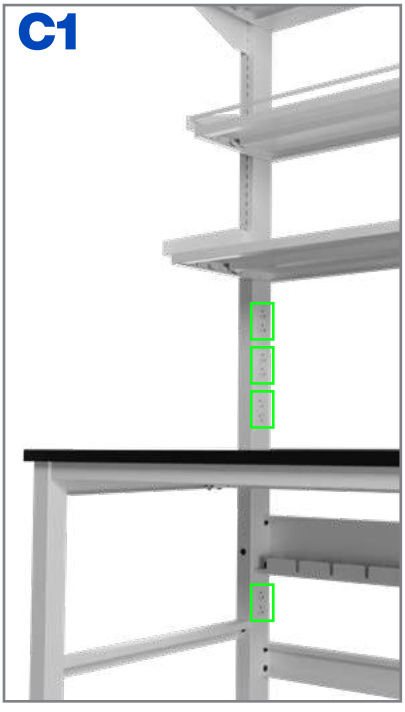

C2

one four-pronged power cord

4-pronged
twist lock
120 VAC — 20A
NEMA L14-20

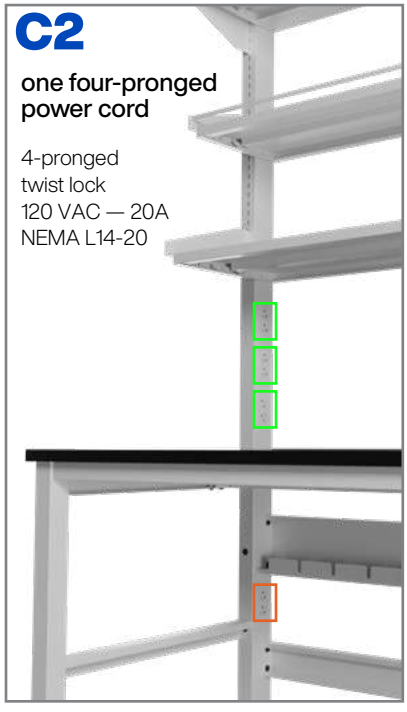


C3

two three-pronged power cords

3-pronged
twist lock
120 VAC — 20A
NEMA L5-20

Note: C3 Circuit Layout is *not* UL Listed.

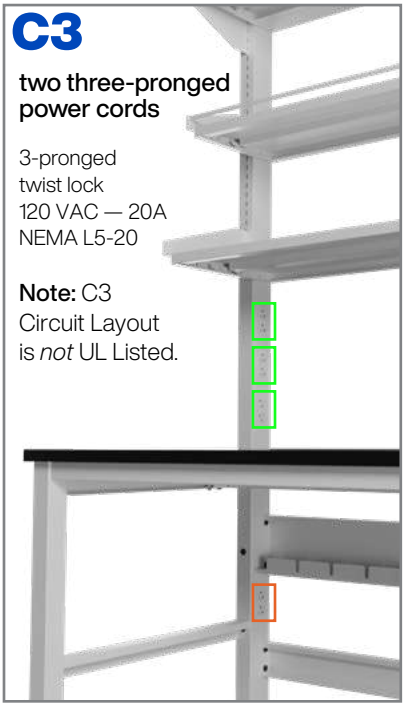

Element Lab Bench



Shown is an assembled bench with top.

Bench = **ET01C843060-P3SWC1GA**
Resin Top = **BB84R013060-BK**



Integrated outlets allow for clean and simple electrical access. Three outlets above and one below the work surface on each electrical post.

Fixtures and data available on plumbed posts.

Available in Kewaunee's standard metal paint colors.

12 Black	**463** Iron Ore	**242** Flint Grey	**85** Satin Grey
94 True Blue	**20** Sand Tan	**61** Light Neutral	**78** Snow White
103 Smokey Blue	**90** Amazon	**102** Agave	**104** Sage
87 Mountain Blue	**62** Driftwood	**97** Invigorate	**99** Rapture Red

Disclaimer: On-screen and printed colors are not exact. Use physical samples for accurate selection.

C = Stabilizing Caster



Minimum Height

at Worksurface
32" with caster
30" with glide

at Top of Uprights
86" with caster
84" with glide

Casters rated for 550lb each.

G = Glide



Maximum Height

at Worksurface
38" with caster
36" with glide

at Top of Uprights
86" with caster
84" with glide


Additional sets of feet can be ordered separately

Part Number	Set of
BBCAST2	4
BBGLIDE	4

Accessories

NOTE: ACCESSORIES ARE ORDERED AND SHIPPED SEPARATELY

KEMRESIN® EPOXY RESIN

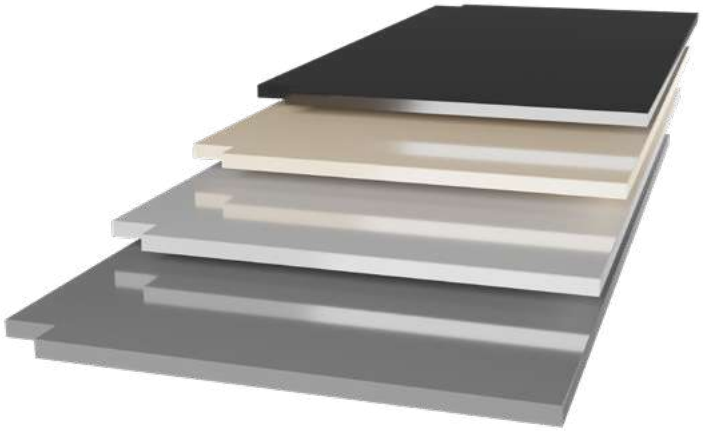

Kemresin® is perfectly suited for use in the lab setting. With ultra-smooth non-porous surface appearance, composed of 1 inch thick molded epoxy resin, these tops come in four different colors. Colors include black, grey, putty and slate.

Grey = **GR** Slate = **SL** Putty = **PT** Black = **BK**

Disclaimer: On-screen and printed colors are not exact. Use physical samples for accurate selection.

BB84R 0 1 [ ] [ ] [ ] [ ] – [ ] [ ]


Depth Length Color

Part Number	Depth	Length
BB84R013036	30	36
BB84R013042	30	42
BB84R013048	30	48
BB84R013054	30	54
BB84R013060	30	60
BB84R013066	30	66
BB84R013072	30	72
BB84R013636	36	36
BB84R013642	36	42
BB84R013648	36	48
BB8401R3654	36	54
BB84R013660	36	60
BB84R013666	36	66
BB84R013672	36	72

Accessories

NOTE: ACCESSORIES ARE ORDERED AND SHIPPED SEPARATELY

UPPER SHELF

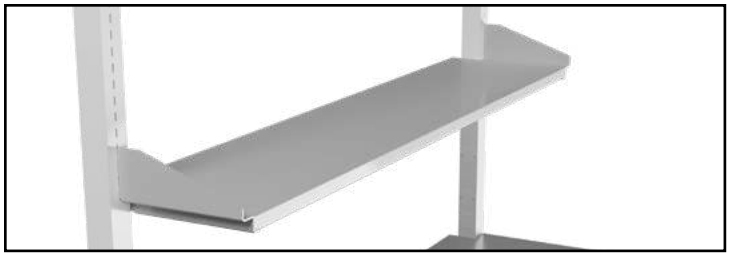

Part Number	Depth	Length
BB21C051236	12	36
BB21C051242	12	42
BB21C051248	12	48
BB21C051254	12	54
BB21C051260	12	60
BB21C051266	12	66
BB21C051272	12	72
BB21C051536	15	36
BB21C051542	15	42
BB21C051548	15	48
BB21C051554	15	54
BB21C051560	15	60
BB21C051566	15	66
BB21C051572	15	72

Shelves are adjustable on 1" increments. Rear of shelves are flush with back of posts.

To order Retaining Rods add **-ROD** to the end of the upper or top shelf part numbers.
Rods are ⅜" powder coated steel.

Example:
BB21C051236-ROD


LOWER SHELF

Part Number	Depth	Length
BB24010936	9	36
BB24010942	9	42
BB24010948	9	48
BB24010954	9	54
BB24010960	9	60
BB24010966	9	66
BB24010972	9	72
BB24C011236	12	36
BB24C011242	12	42
BB24C011248	12	48
BB24C011254	12	54
BB24C011260	12	60
BB24C011266	12	66
BB24C011272	12	72
BB24C011536	15	36
BB24C011542	15	42
BB24C011548	15	48
BB24C011554	15	54
BB24C011560	15	60
BB24C011566	15	66
BB24C011572	15	72



The lower shelf is installed across the bench's lower support.

TOP SHELF

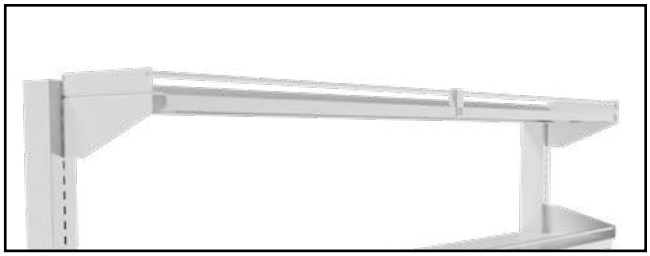

Part Number	Depth	Length
BB28C040936	9	36
BB28C040942	9	42
BB28C040948	9	48
BB28C040954	9	54
BB28C040960	9	60
BB28C040966	9	66
BB28C040972	9	72
BB28C041236	12	36
BB28C041242	12	42
BB28C041248	12	48
BB28C041254	12	54
BB28C041260	12	60
BB28C041266	12	66
BB28C041272	12	72
BB28C051536	15	36
BB28C051542	15	42
BB28C051548	15	48
BB28C051554	15	54
BB28C051560	15	60
BB28C051566	15	66
BB28C051572	15	72

To order the Retaining Rods shown in the image, add **-ROD** to the end of the upper or top shelf part numbers.
Rods are ⅜" powder coated steel.

Example:
BB28C0409363-ROD

SHELF LIPS




Part Number Front Lip	Length	Part Number Rear Lip
BB63C020136	36	BB63C020236
BB63C020142	42	BB63C020242
BB63C020148	48	BB63C020248
BB63C020154	54	BB63C020254
BB63C020160	60	BB63C020260
BB63C020166	66	BB63C020266
BB63C020172	72	BB63C020272

Accessories

NOTE: ACCESSORIES ARE ORDERED AND SHIPPED SEPARATELY


SUSPENDED CABINET HANGING RAIL

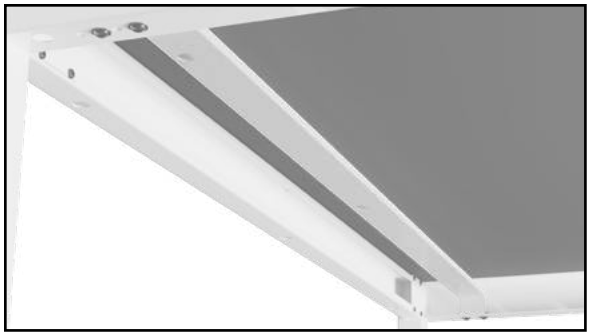

Part Number	Length
BB89C020236	36
BB89C020242	42
BB89C020248	48
BB89C020254	54
BB89C020260	60
BB89C020266	66
BB89C020272	72

Hanging rail allows for the install of Kewaunee's suspended cabinets. The rail bolts in two different positions to support different depth cabinets.

CABINET STOP

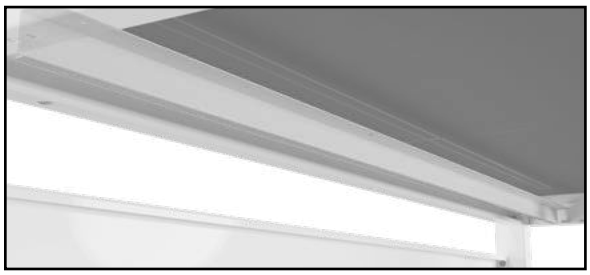

Part Number	Length
BB85C020236	36
BB85C020242	42
BB85C020248	48
BB85C020254	54
BB85C020260	60
BB85C020266	66
BB85C020272	72

Requires cabinet hanging rail. Not compatible with CPU or Keyboard Holders.

KEYBOARD HOLDER




Designed to hold a standard keyboard and mouse. Select 30 or 36 to match bench depth.

BB02C020230 / BB02C020236

Not Compatible with Cabinet Stop.


MONITOR ARM



Monitor arm rotates 360 degrees at two points. With an adjustable head with universal monitor mount, arm easily clamps onto any Element Lab Bench.

BB04C360324

TOP RAIL DUST COVER

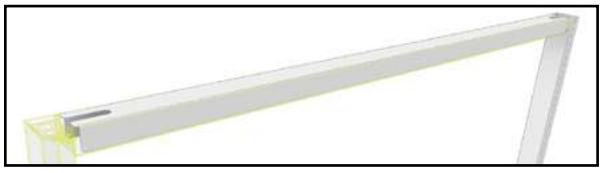

Part Number	Length
ET02C020336	36
ET02C020342	42
ET02C020348	48
ET02C020354	54
ET02C020360	60
ET02C020366	66
ET02C020372	72

CPU HOLDER



The CPU holder attaches via a bracket mount and swivels side to side. The heavy duty holder is adjusted 12" to 20" high and 3.5" to 9" depth. Not Compatible with Suspended Cabinets. Select 30 or 36 to match bench depth.


BB03C020230 / BB03C020236

Not Compatible with Cabinet Stop.

Accessories

NOTE: ACCESSORIES ARE ORDERED AND SHIPPED SEPARATELY

LED TASK LIGHTING

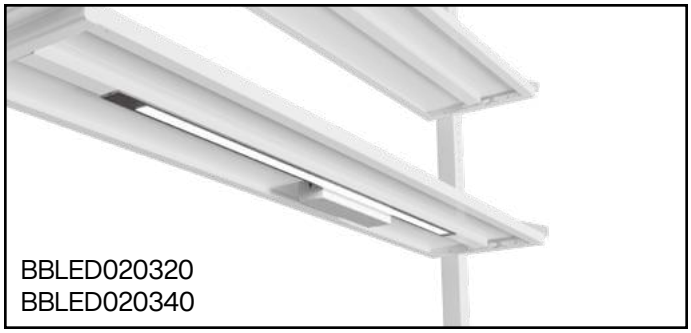

BBLED020320
BBLED020340

LED Task Lighting consists of a thin-profile, white, LED strip, 9.5 mm high by 33mm deep with a touch dimmer switch. It is UL listed and furnished with a 120 VAC to 24 VDC power supply with ten foot power cord. The light includes a magnetic mounting strip for mounting to steel shelving.


BBML20 & BBML40 Kits that include a power supply and power supply mounting bracket.

Part Number	Length
BBLED020320	20
BBLED020340	40

Lights listed below do not include power supplies or power supply mounting brackets. These can be purchased as replacement parts.

Part Number	Length	Fits under
X-030002-00	500mm - 19 5/8	29” - 40” Shelves
X-030003-00	1000mm - 39 3/8	46” - 47” Shelves

LEG ANCHOR

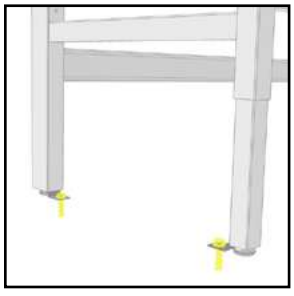

Part Number	Set of
BB05C000001	4

The leg anchor bracket captures the glide on each leg to prevent movement in any direction. The bracket has a mounting hole for an anchor bolt (not included).

FIXTURES

Hose Type	Part Number	Total Length
AIR/VAC/NIT	BBFXPVHS046-*IN*	46"
AIR/VAC/NIT	BBFXPVHS096-*IN*	96"
AIR/VAC/NIT	BBFXPVHS168-*IN*	168"
GAS	BBFXSSHS046-*IN*	46"
GAS	BBFXSSHS096-*IN*	96"
GAS	BBFXSSHS168-*IN*	168"

-IN only if installed



Choose up to three fixtures per side. Fixtures can be installed on the assembled or knockdown version, as well as ordered separately.


The AIR/VAC/NIT service fixtures include PVC hose at desired length. GAS service fixtures include stainless steel hoses at desired length. Tech sheet required for installed fixtures.

Fixture and hose come preassembled terminated in a female swivel. Hoses are white as standard.



Male Quick-Connect Fitting 3/8" IPS Male

Part Number	Key Color
W-8111-K2	Orange
W-8111-K4	Yellow
W-8111-K5	Blue
W-8111-K7	Purple
W-8111-K8	Brown




Female Quick-Connect Fitting 3/8" IPS Female

Part Number	Key Color
W-9112-K2	Orange
W-9112-K4	Yellow
W-9112-K5	Blue
W-9112-K7	Purple
W-9112-K8	Brown

Accessories

NOTE: ACCESSORIES ARE ORDERED AND SHIPPED SEPARATELY

POWER CORD–ASSEMBLED

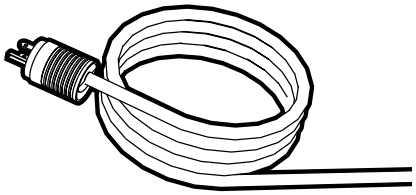

Part Number

ETPCC1-03B

Circuit Type
C1 = 3-Prong Plug
C2 = 4-Prong Plug


Cord Color
B = Black
W = White

Cord Length
(above top of post)
03 = 3'
04 = 4'
05 = 5'
06 = 6'
08 = 8'

Single-circuit 3-prong
120 VAC — 20A — NEMA L5-20

Dual-circuit 4-prong
120 VAC — 20A — NEMA L14-20

POWER CORD–WHITE MOLDED



Single-circuit 3-wire
120 VAC — 20A — NEMA L5-20

Part Number	Length	Plug Type
ETPMW03-36	36"	Twist-Lock
ETPMW03-48	48"	Twist-Lock
ETPMW03-60	60"	Twist-Lock
ETPMW03-72	72"	Twist-Lock
ETPMW03-96	96"	Twist-Lock

Dual-circuit 4-wire
120 VAC — 20A — NEMA L14-20

Part Number	Length	Plug Type
ETPMW04-36	36"	Twist-Lock
ETPMW04-48	48"	Twist-Lock
ETPMW04-60	60"	Twist-Lock
ETPMW04-72	72"	Twist-Lock
ETPMW04-96	96"	Twist-Lock

Efficient Storage

CASEWORK


Clearance allows for our 36" standing height, mobile, cabinets or an accessory rail for hanging suspended cabinets. Storage cabinets are available in the same standard colors as the bench, for easy color coordination.





SHELVING


Maximize and organize lab storage by configuring shelves to meet the needs of your lab. Clear sight lines or storage capacity can be your priority, all without sacrificing your access to multiple electrical outlets.

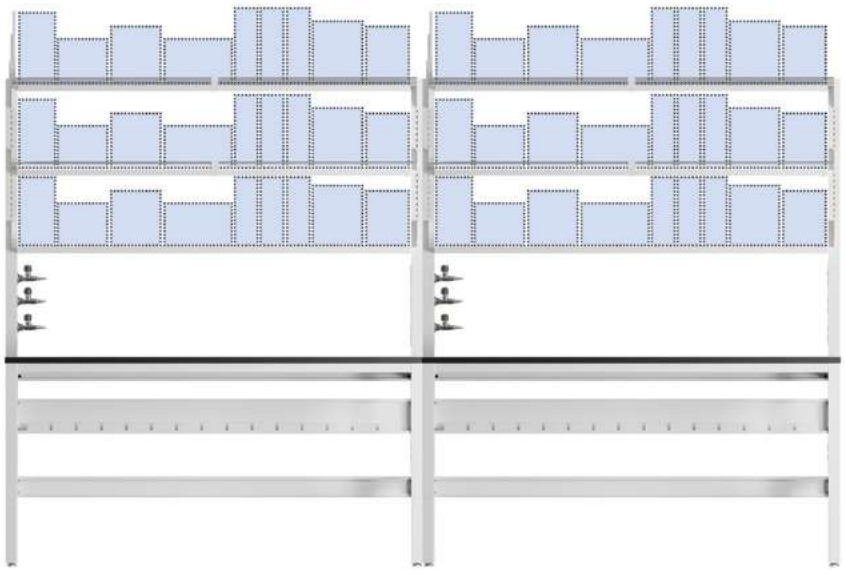

Technical Information

DIMENSIONAL DATA

for reference only

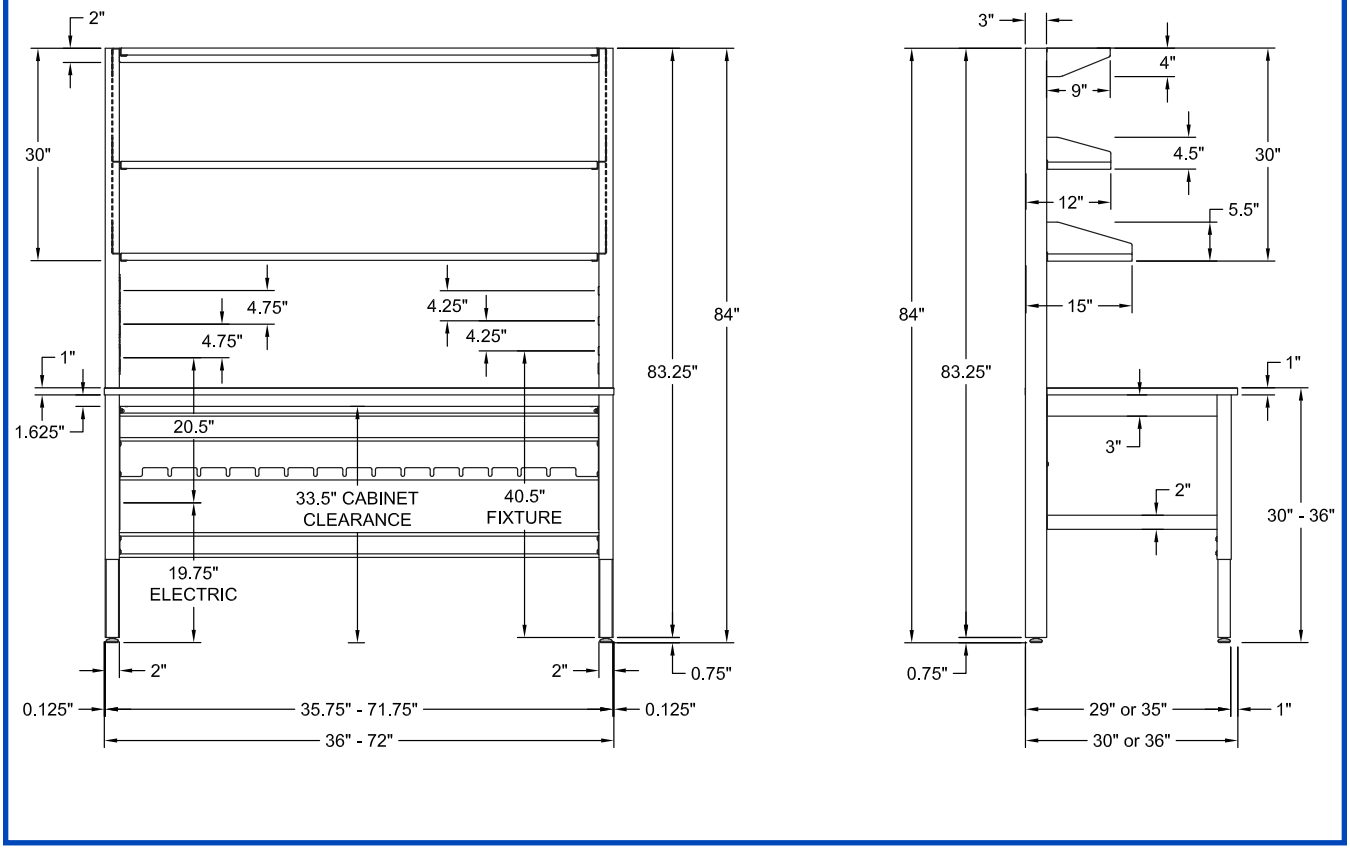

NOTES

Load Ratings:

MAX 1000 lbs on work surface,
MAX 200 lbs on each shelf.

This product is intended to be used in a laboratory environment. The bench provides support for laboratory equipment and supplies electrical outlets for use in laboratory applications.

Plumbed posts receive only data bezels pre-installed. No data devices are included. Data bezel accepts all Keystone and QuickPort jacks for hard-wired field installations. Electrical posts do not include data bezels.

Electrical Specs:

SJ-12-3 cord terminating at one (1) twist lock NEMA L5-20P plug at one end and one (1) circuit with one (1), two (2), three (3) or four (4) 125 V, 20 A duplex receptacles at the other end. Or alternatively, SJ-12-4 cord terminating at one (1) twist lock L14-20P plug at one end and at two (2) circuits each with one (1) or two (2) 125 V, 20 A duplex receptacles at the other end. Or alternatively, two (2) SJ-12-3 cords terminating at two (2) twist lock NEMA L5-20P plug at one end and at two (2) circuits each with one (1) or two (2) 125 V, 20 A duplex receptacles at the other end. In each circuit, the duplex receptacles may be replaced by a GFCI protected receptacle.

Plumbing Specs:

Non-electrified post may come supplied with up to three pre-piped service fixtures. Air, Vacuum and Nitrogen fixtures can be supplied with a PVC hose at specified length, and Natural Gas fixtures can be supplied with a rated stainless steel hose at specified length. Hoses terminate at female ⅜ NPT connector.
Length of plumbed hose available above the post can be found by subtracting 34.25 for top 38.5 for the middle and 42.75 for bottom locations from the total hose length above.

ELEMENT

Be In Your Element



VISIT KEWAUNEE.COM TO FIND YOUR LOCAL DEALER

Kewaunee Scientific Corporation
P.O. Box 1842 • Statesville, NC 28687-1842
704-873-7202 • kscmarketing@kewaunee.com
kewaunee.com

Kewaunee Labway India Pvt. Ltd.
No. CA-9A, 2nd Floor, Jigani Link Road
Jigani, Bangalore 562 106, India
Phone: 9180-27826725 • Fax: 9180-27826724
Web Site: www.kewaunee.in

Kewaunee Labway Asia Pte. Ltd.
194 Pandan Loop, #06-22
Pantech Business Hub, Singapore 128 383
Phone: 65-6773-0288 • Fax: 65-6773-2322

Kewaunee, Alpha, BasikBench, Enterprise, Evolution, Kemresin, Kewaunee Matrix, Research Collection, Signature, and Supreme Air are registered trademarks of Kewaunee Scientific Corporation

KEWAUNEE®

© Copyright 2026

Digital Version 09/15/26