



## **Solution Hood**

The Solution Hood was designed to handle a multitude of applications. Its streamlined posts and radiused airfoil, along with a 36-inch high viewing area, offer a softer look than conventional fume hoods. The hood passed NIH, EPA and ASHRAE 110 testing by a third party at 100 FPM and 60 FPM full open and at 18 inches. The hood can be used in both CAV and VAV designs.


## so adaptable.


- Powder coated finish
- Full frame construction
- Chain and sprocket shaft drive sash
- UL listed poly resin liner
- · Flush mount airfoil
- T-8 fluorescent lights
- Full-length finger lift
- 36" high sightline

- Full view sash
- 10" round SS duct collar(s)
- 60-100 FPM
- Designed for CAV or VAV HVAC systems
- Optimal interior working depth
- 18" auto-return sash available
- Knock down ready



## **Solution Hood**



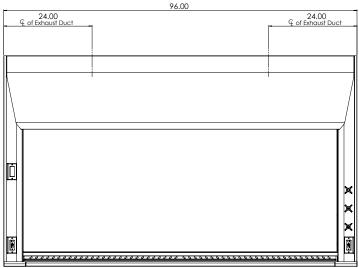

9.78
Q of Exhaust Duct

10" Diameter SS Duct

SS Duct

GASKETED ACCESS PANEL

24.50 or 30.50
30.00 or 36.00

33.75 or 39.75

SOLUTION HOOD FRONT VIEW:

SOLUTION HOOD END VIEW:

| Part Number* | Superstructure |        |        | Heed Onening            | 18" Sash Height  |                 | Haad Onanina            | 28" Sash Height  |                 |                 |
|--------------|----------------|--------|--------|-------------------------|------------------|-----------------|-------------------------|------------------|-----------------|-----------------|
|              | W              | н      | D*     | Hood Opening<br>(sq ft) | CFM @<br>100 FPM | CFM @<br>60 FPM | Hood Opening<br>(sq ft) | CFM @<br>100 FPM | CFM @<br>60 FPM | Static Pressure |
| Solution-48  | 48"            | 57.25" | 33.75" | 4.75                    | 475              | 285             | 7.39                    | 739              | 433             | .25"            |
| Solution-60  | 60"            | 57.25" | 33.75" | 6.25                    | 625              | 375             | 9.72                    | 972              | 583             | .33"            |
| Solution-72  | 72"            | 57.25" | 33.75" | 7.75                    | 775              | 465             | 12.06                   | 1206             | 723             | .50"            |
| Solution-96  | 96"            | 57.25" | 33.75" | 10.75                   | 1075             | 645             | 16.72                   | 1672             | 1003            | .26"            |

<sup>\*</sup> Additional depths available. Use suffix -40D for 39.75".

